


## 2-jaw non-selfcentering angular pneumatic sprue gripper series PB

(\*)

The sensor SS3N203-G is included

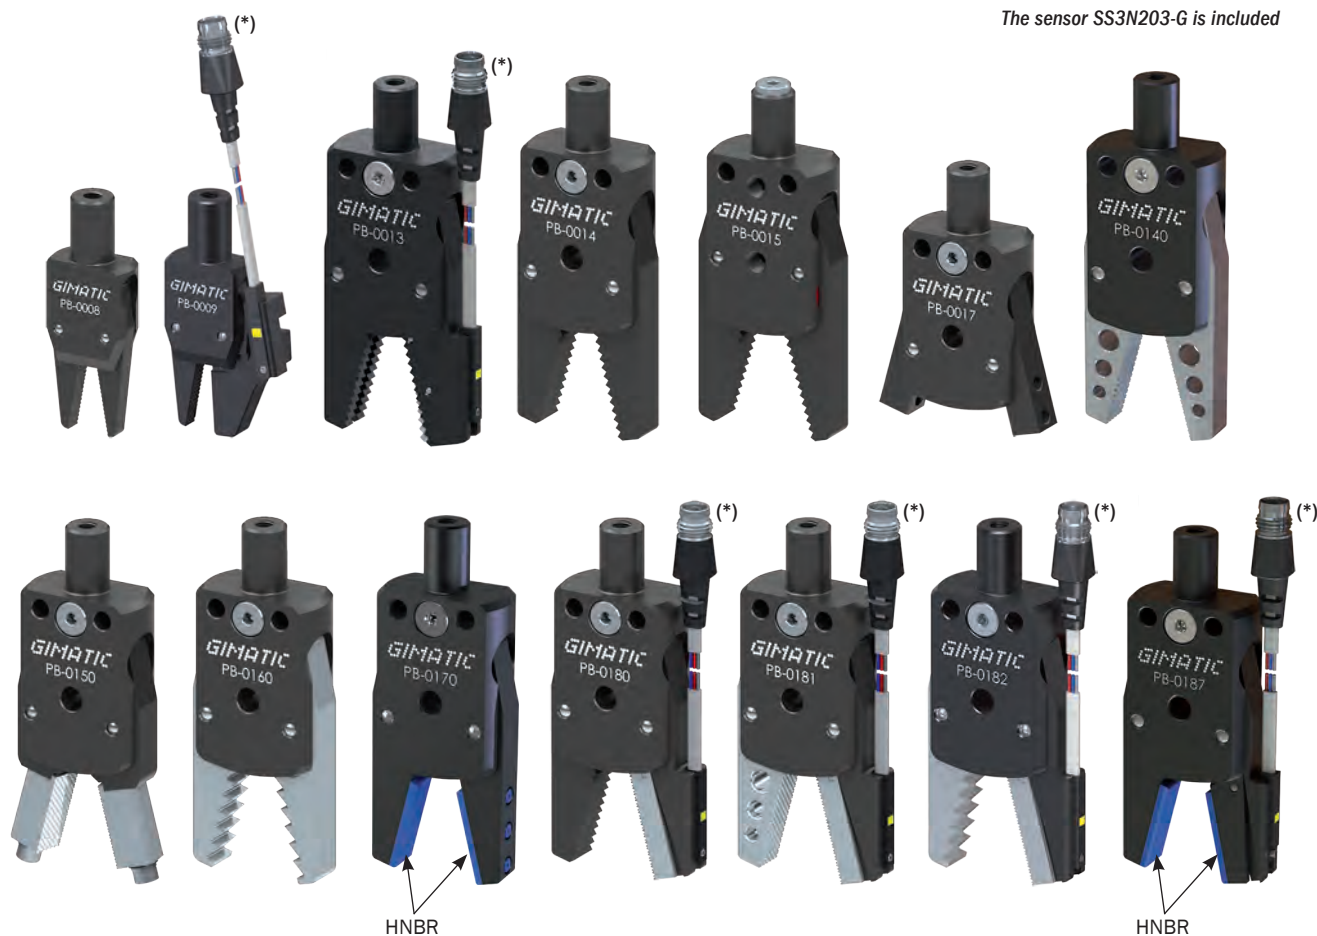

	PB-0008	PB-0009	PB-0013	PB-0014	PB-0015	PB-0017	PB-0140	PB-0150	PB-0160	PB-0170	PB-0180	PB-0181	PB-0182	PB-0187
Fluido Medium	Aria compressa filtrata, lubrificata / non lubrificata Filtered, lubricated / non lubricated compressed air													
Pressione di esercizio Pressure range	2.5 ÷ 8 bar													
Temperatura di esercizio Temperature range	5 ÷ 60 °C.													
Corsa Stroke (±2°)	2x10°	2x10°	2x15°	2x15°	2x16°	2x15°	2x15°	2x15°	2x15°	2x15°	2x15°	2x15°	2x15°	2x15°
Coppia di serraggio per griffa in chiusura a 6 bar Closing gripping torque at 6 bar each jaw	24 Ncm	24 Ncm	80 Ncm	80 Ncm	60 Ncm	80 Ncm	80 Ncm	80 Ncm	80 Ncm	80 Ncm	80 Ncm	80 Ncm	80 Ncm	80 Ncm
Coppia per griffa in apertura (a 6 bar) Opening gripping torque (at 6 bar) each jaw	2 Ncm	2 Ncm	5 Ncm	5 Ncm	5 Ncm (25 Ncm)	5 Ncm	5 Ncm	5 Ncm	5 Ncm	5 Ncm	5 Ncm	5 Ncm	5 Ncm	5 Ncm
Frequenza max funzionamento continuativo Maximum working frequency	3 Hz													
Consumo d'aria per ciclo Cycle air consumption	0.3 cm <sup>3</sup>	0.3 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.5 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>	1.2 cm <sup>3</sup>
Tempo di chiusura senza carico Closing time without load	0.01 s													
Peso Weight	15 g	25 g	55 g	50 g	50 g	45 g	75 g	75 g	75 g	50 g	60 g	75 g	75 g	57 g