



Threaded-body rotative suspensions

- Body and rod in anodized aluminum.
- Rotative rod.
- Pressure range: $-1 \div 8$ bar.

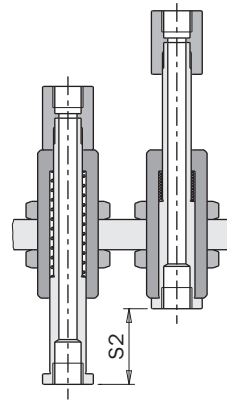

VSRT

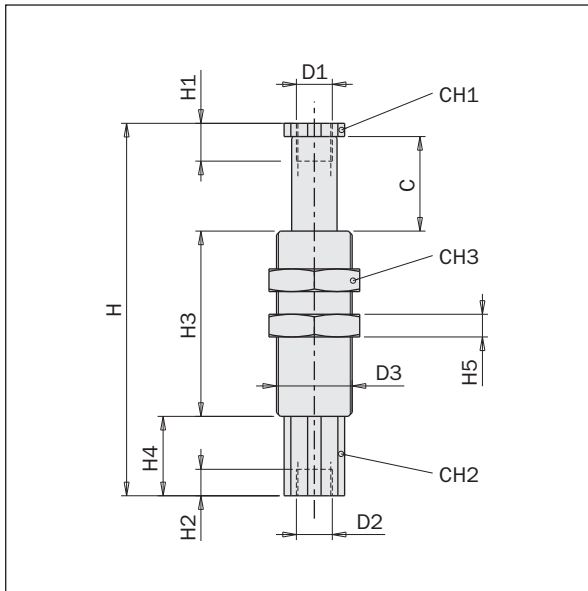

	VSRT1010	VSRT1025	VSRT1420	VSRT1435	VSRT1620	VSRT1635	VSRT2025	VSRT2050
H [mm]	51	85.5	92.5	127.5	92.5	127.5	98.5	156
H1 [mm]	6	6	10	10	10	10	10	10
H2 [mm]	5	5	7	7	7	7	7	7
H3 [mm]	21	40.5	38.5	58.5	38.5	58.5	49	81.5
H4 [mm]	17	17	20	20	20	20	21	21
H5 [mm]	3.5	3.5	4	4	5	5	6	6
D1	M5	M5	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"
D2	M5	M5	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"	G1/8"
D3	M10x1	M10x1	M14x1.5	M14x1.5	M16x1	M16x1	M20x1.5	M20x1.5
CH1 [mm]	8	8	12	12	12	12	16	16
CH2 [mm]	8	8	12	12	12	12	16	16
CH3 [mm]	13	13	17	17	19	19	24	24
C [mm]	10	25	20	35	20	35	25	50
S2 [mm]	10	25	20	35	20	35	25	50
d [mm]	0	0	0	0	0	0	0	0
K [N/mm]	0.213	0.085	0.268	0.150	0.268	0.150	0.275	0.141
R1 [N]	1.490	1.575	3.617	4.267	3.617	4.267	4.131	4.308
R2 [N]	3.619	3.704	8.975	9.507	8.975	9.507	11.02	11.37
m [g]	11	16	32	42	40	50	70	104