



# rtc<sup>®</sup>

COUPLING TECHNOLOGY  
[www.rtc-tec.com](http://www.rtc-tec.com)



## 450.03

rtc TYPE





#### Compatible

rtc 170.03  
rtc 173.03

#### Temperature Range

Nitrile (N) -20°C + 110°C (- 4°F + 230°F)  
FPM (V) -20°C + 180°C (- 4°F + 356°F)  
EPDM (Ethylene Propylene) -40°C + 150°C (- 40°F + 302°F)

#### Working Pressure

25 Bar (360 PSI)

#### Connction / Disconnection Max. Pressure

15 Bar (220 PSI)

#### Flow size

rtc type 450.03 3mm (1/8")

#### Standard version

Seals - Dichtung : Nitrile (N)

#### Material of steel version

Socket Body - Kupplungsgrundkörper	Steel tenifer threaded Stahl teneferiert
Back Part - Hinterteil	Steel zinc-nickel plated Stahl Zink-Nickel beschichtet
Sleeve - Hülse	Steel zinc-nickel plated Stahl Zink-Nickel beschichtet und orange Lackiert
Springs - Federn	Stainless steel - Edelstahl
Seals - Dichtungen	Nitrile (N)
Plug - Nippel	Steel tenifer threaded Stahl teneferiert

#### Advantages


- Plug profile perfectly fits to the ISO 6150-C-8, AFNOR C-8 NF E 49-053
- Negligible Connecting Force
- Smart and Ergonomic features
- Ease of Handling
- Optimised Size

#### Material of stainless steel version

Socket Body - Kupplungsgrundkörper	Stainless steel Edelstahl
Back Part - Hinterteil	Stainless steel - Edelstahl
Sleeve - Hülse	Stainless steel - Edelstahl
Springs - Federn	Stainless steel - Edelstahl
Seals - Dichtungen	FPM (V)
Plug - Nippel	Stainless steel - Edelstahl



Flow Rate vs Pressure Drop Graph

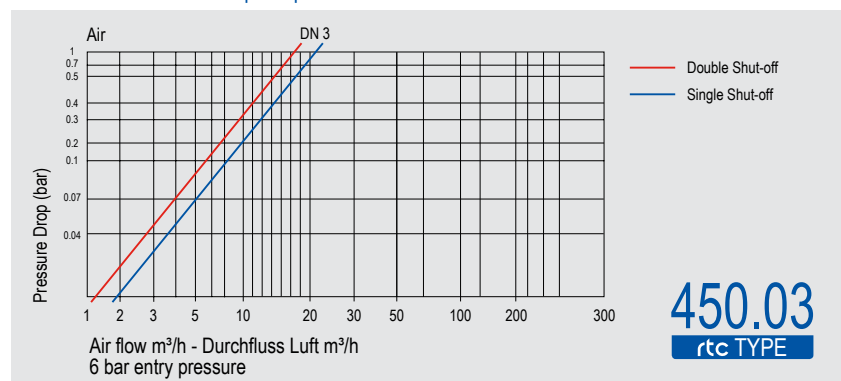


**rtc** TYPE 450.03

Metal sleeve socket with male thread / Kupplung mit Metallhülse und Aussengewinde



Socket / Kupplung

Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
3	-	450.03 SMB 10	BSP 1/8	17	42.5	34.5	14
3	-	450.03 SMB 13	BSP 1/4	17	44.5	34.5	14
3	-	450.03 STB 10	NPT 1/8	17	43.5	34.5	14
3	R303 00 582	450.03 SMB 10-S6	BSP 1/8	17	42.5	34.5	14
3	R303 00 583	450.03 SMB 13-S6	BSP 1/4	17	44.5	34.5	14
3	R303 00 584	450.03 STB 10-S6	NPT 1/8	17	43.5	34.5	14



\*S6: Stainless Steel / Edelstahl


**rtc** TYPE 450.03

Metal sleeve socket with female thread / Kupplung mit Metallhülse und Innengewinde



Socket / Kupplung

Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
3	-	450.03 SFB 10	BSP 1/8	17	39	-	14
3	-	450.03 SNB 10	NPT 1/8	17	39	-	14
3	R303 00 580	450.03 SFB 10-S6	BSP 1/8	17	39	-	14
3	R303 00 581	450.03 SNB 10-S6	NPT 1/8	17	39	-	14



\*S6: Stainless Steel / Edelstahl


**rtc** TYPE 450.03

Metal sleeve standard hose socket / Kupplung mit Metallhülse und Schlauchanschluss



Socket / Kupplung

Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
3	-	450.03 SHB 04	Ø4 - 3/16	17	46	-	-
3	-	450.03 SHB 06	Ø6 - 1/4	17	46	-	-
3	-	450.03 SHB 08	Ø8 - 5/16	17	46	-	-
3	R303 00 585	450.03 SHB 04-S6	Ø4 - 3/16	17	46	-	-
3	R303 00 586	450.03 SHB 06-S6	Ø6 - 1/4	17	46	-	-
3	R303 00 587	450.03 SHB 08-S6	Ø8 - 5/16	17	46	-	-



\*S6: Stainless Steel / Edelstahl


**rtc** TYPE 450.03

Male thread plug / Nippel mit Aussengewinde




Plug / Nippel

Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
3	-	450.03 PMF 10	BSP 1/8	-	36.5	28.5	14
3	-	450.03 PTF 10	NPT 1/8	-	37.5	28.5	14
3	R355 00 274	450.03 PMF 10-S6	BSP 1/8	-	36.5	28.5	14
3	R355 00 338	450.03 PTF 10-S6	NPT 1/8	-	37.5	28.5	14




\*S6: Stainless Steel / Edelstahl

Female thread plug / Nippel mit Innengewinde TYPE 450.03 

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	3	-	450.03 PFF 10	BSP 1/8	-	35	-	13
	3	-	450.03 PNF 10	NPT 1/8	-	35	-	13
	3	R355 00 273	450.03 PFF 10-S6	BSP 1/8	-	35	-	13
	3	R355 00 339	450.03 PNF 10-S6	NPT 1/8	-	35	-	13


\*S6: Stainless Steel / Edelstahl

Standard hose plug / Nippel mit Schlauchanschluss TYPE 450.03 

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	3	-	450.03 PHF 04	Ø4 - 5/32	10	39.5	-	-
	3	-	450.03 PHF 06	Ø6 - 1/4	10	39.5	-	-
	3	R355 00 276	450.03 PHF 04-S6	Ø4 - 5/32	10	39.5	-	-
	3	R355 00 277	450.03 PHF 06-S6	Ø6 - 1/4	10	39.5	-	-


\*S6: Stainless Steel / Edelstahl

Male thread plug with valve / Verschlussnippel mit Aussengewinde TYPE 450.03 

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	3	-	450.03 PMB 10	BSP 1/8	-	49.5	41.5	14
	3	-	450.03 PTB 10	NPT 1/8	-	50.5	41.5	14
	3	-	450.03 PMB 10-S6	BSP 1/8	-	49.5	41.5	14
	3	-	450.03 PTB 10-S6	NPT 1/8	-	50.5	41.5	14

\*S6: Stainless Steel / Edelstahl

Female thread plug with valve / Verschlussnippel mit Innengewinde TYPE 450.03 

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	3	-	450.03 PFB 10	BSP 1/8	-	50.5	-	14
	3	-	450.03 PNB 10	NPT 1/8	-	50.5	-	14
	3	-	450.03 PFB 10-S6	BSP 1/8	-	50.5	-	14
	3	-	450.03 PNB 10-S6	NPT 1/8	-	50.5	-	14

\*S6: Stainless Steel / Edelstahl

Standard hose plug with valve / Verschlussnippel mit Schlauchanschluss TYPE 450.03 

Plug / Nippel	Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
	3	-	450.03 PHB 04	Ø4 - 5/32	-	54.5	-	-
	3	-	450.03 PHB 06	Ø6 - 1/4	-	54.5	-	-
	3	-	450.03 PHB 04-S6	Ø4 - 5/32	-	54.5	-	-
	3	-	450.03 PHB 06-S6	Ø6 - 1/4	-	54.5	-	-

\*S6: Stainless Steel / Edelstahl