

rtc[®]

QUICK CONNECT TECHNOLOGY
www.rtc-tec.com



463.08

rtc TYPE



info@hidrafluid.es
976 24 32 10



Compatible

rtc	025
rtc	026
Cejn	320
Rectus	25 & 26

Temperature Range

Nitrile (N)	-20°C + 110°C (- 4°F + 230°F)
FPM (V)	-20°C + 180°C (- 4°F + 356°F)
EPDM (Ethylene Propylene)	-40°C + 150°C (- 40°F + 302°F)

Working Pressure

25 Bar (360 PSI)

Connction / Disconnection Max. Pressure

15 Bar (220 PSI)

Flow size

rtc type 463.08 7.8mm (3/8")

Standard version

Seals - Dichtung : Nitrile (N)

Material of Standard Coupler


Body / Housing - Kupplungsgrundkörper/Gehäuse	Steel tenifer threated Stahl teneferiert
Inner Part / Cylinder - Innenteil / Zylinder	Surface hardened steel Zinc-nickel plated Stahl gehärtet, Zink-Nickel beschichtet
Back Part - Hinterteil Sleeve -	Steel zinc plated - Stahl verzinkt Zinc diecasted, nickel plated & orange plastic coated
Hülse	Zinc-Druckguss, vernickelt und orange Gummi beschichtet
Springs - Federn	Stainless steel - Edelstahl
Seals - Dichtungen	Nitrile (N)
Plug - Nippel	Surface hardened steel, galvanized Stahl gehärtet, verzinkt

Advantages

- The system perfectly fits to the ISO 4414, EN 983 safety requirements.
- Through flow, minimum pressure loss.
- Negligible Connecting Force
- Smart and Ergonomic features
- Ease of Handling
- Optimised Size



Flow Rate vs Pressure Drop Graph

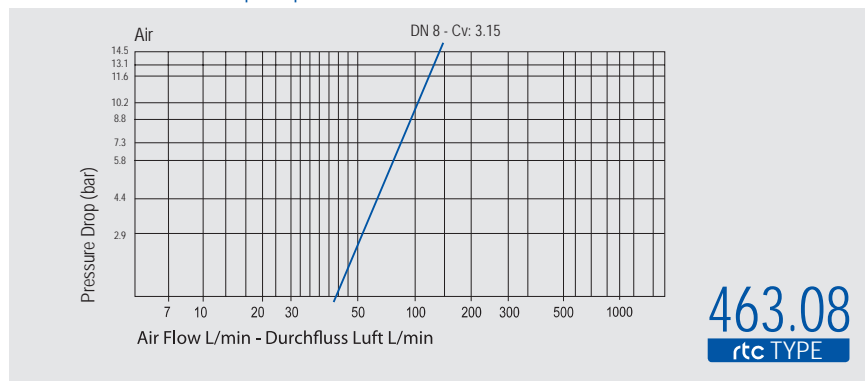


rtc TYPE 463.08

Male thread socket / Kupplung mit Aussengewinde



Socket / Kupplung

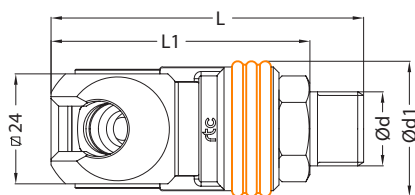


Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	R205 00 351	463.08 SMO 13	BSP 1/4	30	69.5	58.5	20
8	R205 00 352	463.08 SMO 17	BSP 3/8	30	69.5	58.5	20
8	R205 00 353	463.08 SMO 21	BSP 1/2	30	71.5	59.5	22
8	R205 00 375	463.08 STO 13	NPT 1/4	30	70.5	56.5	20
8	R205 00 354	463.08 STO 17	NPT 3/8	30	71.5	57.5	20
8	R205 00 355	463.08 STO 21	NPT 1/2	30	78.5	59.5	22

rtc TYPE 463.08

Female thread socket / Kupplung mit Innengewinde



Socket / Kupplung

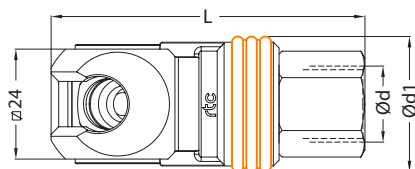


Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	R205 00 345	463.08 SFO 13	BSP 1/4	30	68.5	-	20
8	R205 00 346	463.08 SFO 17	BSP 3/8	30	68.5	-	20
8	R205 00 347	463.08 SFO 21	BSP 1/2	30	69.5	-	24
8	R205 00 348	463.08 SNO 13	NPT 1/4	30	68.5	-	20
8	R205 00 349	463.08 SNO 17	NPT 3/8	30	68.5	-	20
8	R205 00 350	463.08 SNO 21	NPT 1/2	30	69.5	-	24

rtc TYPE 463.08

Socket with hose barb / Kupplung mit Schlauchanschluss



Socket / Kupplung

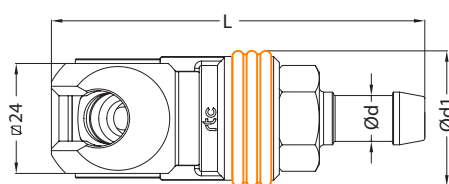


Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	R205 00 356	463.08 SHO 08	Ø8 - 5/16	30	79	-	-
8	R205 00 357	463.08 SHO 10	Ø10 - 3/8	30	79	-	-
8	R205 00 358	463.08 SHO 13	Ø13 - 1/2	30	79	-	-

rtc TYPE 463.08

Socket with plastic hose connection / Kupplung mit Kunststoffschlauchanschluss



Socket / Kupplung

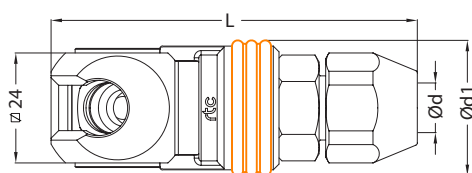

Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	R205 00 359	463.08 SVO 0610	6.5x10	30	80	-	22
8	R205 00 360	463.08 SVO 0812	8x12	30	80	-	22
8	R205 00 361	463.08 SVO 1116	11x16	30	84	-	27




Plug with male thread / Nippel mit Aussengewinde

TYPE 463.08



Plug / Nippel



Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	R255 00 023	463.08 PMF 13	BSP 1/4	-	37	26	14
8	R255 00 024	463.08 PMF 17	BSP 3/8	-	38.5	27.5	19
8	R255 00 025	463.08 PMF 21	BSP 1/2	-	43	30	22
8	R255 00 275	463.08 PTF 13	NPT 1/4	-	38	26	14
8	R255 00 177	463.08 PTF 17	NPT 3/8	-	39.5	27.5	17
8	R255 00 175	463.08 PTF 21	NPT 1/2	-	47	30	22




Plug with female thread / Nippel mit Innengewinde

TYPE 463.08



Plug / Nippel

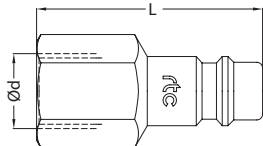

Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	R255 00 026	463.08 PFF 13	BSP 1/4	-	38	-	17
8	R255 00 027	463.08 PFF 17	BSP 3/8	-	39	-	19
8	R255 00 028	463.08 PFF 21	BSP 1/2	-	43	-	24
8	R255 00 276	463.08 PNF 13	NPT 1/4	-	38	-	17
8	R255 00 178	463.08 PNF 17	NPT 3/8	-	39.5	-	19
8	R255 00 176	463.08 PNF 21	NPT 1/2	-	44	-	24




Plug with hose barb / Nippel mit Schlauchanschluss

TYPE 463.08



Plug / Nippel



Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	R255 00 029	463.08 PHF 08	Ø8 - 5/16	14	50	-	-
8	R255 00 030	463.08 PHF 10	Ø10 - 3/8	14	50	-	-
8	R255 00 031	463.08 PHF 13	Ø13 - 1/2	16	50	-	-




Plug with plastic hose connection / Nippel mit Kunststoffschlauchanschluss

TYPE 463.08



Plug / Nippel

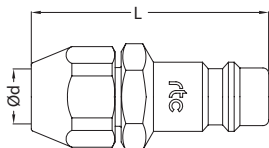

Size / Größe	Alternative Order No Alternative Bestellnr.	Order No / Bestellnr.	Ød	Ød1	L	L1	HEX.
8	-	463.08 PVF 0610	6.5x10	-	51	-	22
8	-	463.08 PVF 0812	8x12	-	51	-	22
8	-	463.08 PVF 1116	11x16	-	52.5	-	27